


FIGHTER™

by Gabriel



66081

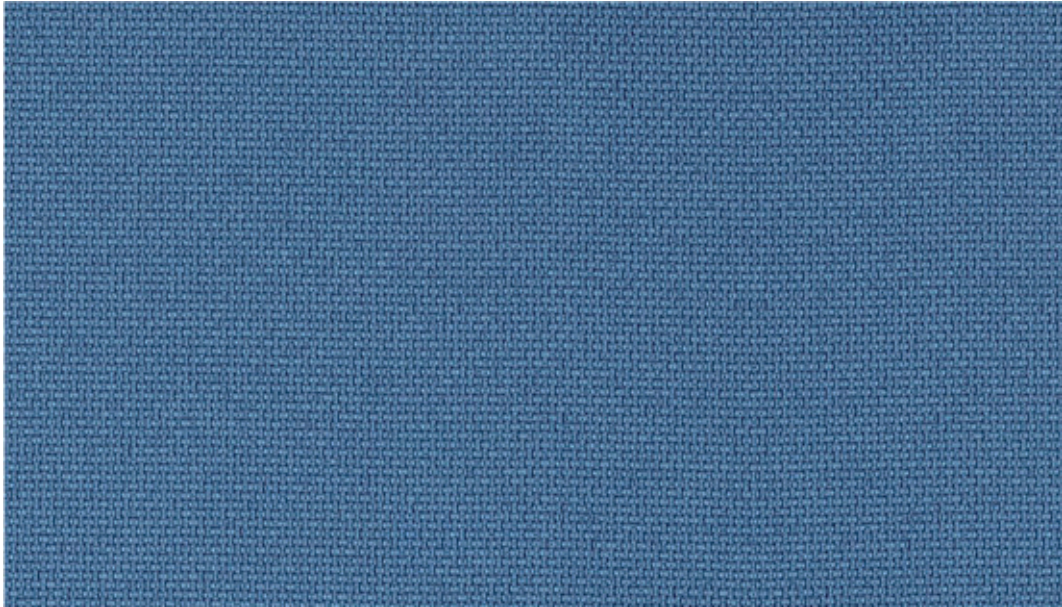

60082




61095



63044



60083

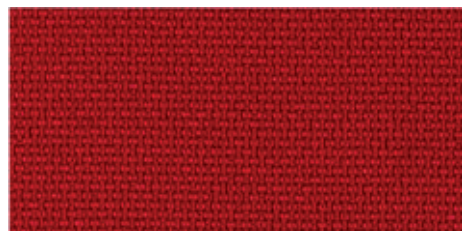

64103




60999




64102


Please be aware that the PDF colour shades can appear different from the real fabric colours.

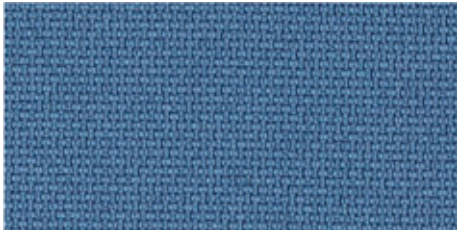

66081

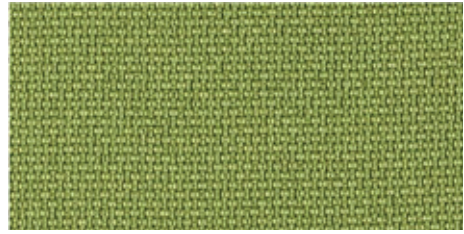

68069

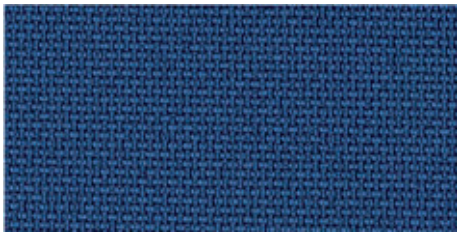

66082




68070



66083

Please be aware that the PDF colour shades can appear different from the real fabric colours.

FIGHTER™

| | | |
|----------------------------|--|------------|
| Design no. | 8610 | |
| Fields of application | contract furnishing | |
| Material | polyester | 100% |
| Weight | lin. metre · lin. yard approx. grams | 510 · 466 |
| Width | cm · yard | 140 · 1,53 |
| Abrasion resistance | rubs · EN ISO 12947-2 (Martindale) | 130.000 |
| Pilling | scale 1-5, max. 5 · EN ISO 12945-2 | 4-5 |
| Colour fastness to light | scale 1-8, max. 8 · EN ISO 105 - B02 | 5-7 |
| Colour fastness to rubbing | scale 1-5, max. 5 · EN ISO 105x12 (wet/dry) | 4-5 |
| ACT | AATCC 8-2001 Wet and Dry Crocking · California Bulletin CAL 117-E-Class 1 ASTM D4157-02 Wyz Abrasion · ASTM D3511 Pilling | |
| Cleaning | dry cleaning (P)  Shrinkage: max 2% | P-cleaning |
| Flammability | EN 1021 1&2 · Calif. Tech. Bull. 117, sec. E · Önorm B 3825 B1 - 3800-Q1 UK · BS 5852 Part 1 0,1 Cigarette & match · AM 18 - NF D 60-013 · UNI 9175 Class 1 I EMME. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used and fireproof treatment. | |
| Design/Colours | Inger Mosholt Nielsen | |

Subject to changes and colour differences



QUALITY SYSTEM AND ENVIRONMENTAL MANAGEMENT SYSTEM
DS/EN ISO 9001
DS/EN ISO 14001

