



Q
e
R
i
Q

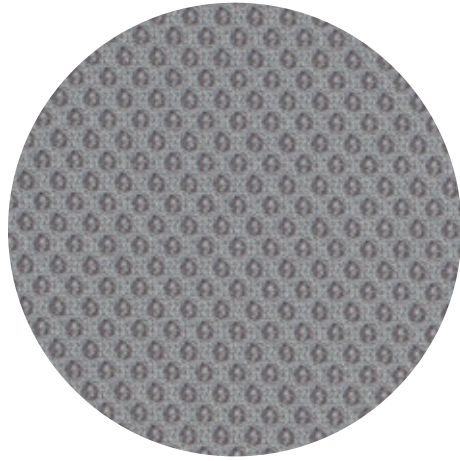

RUNNER™

by Gabriel

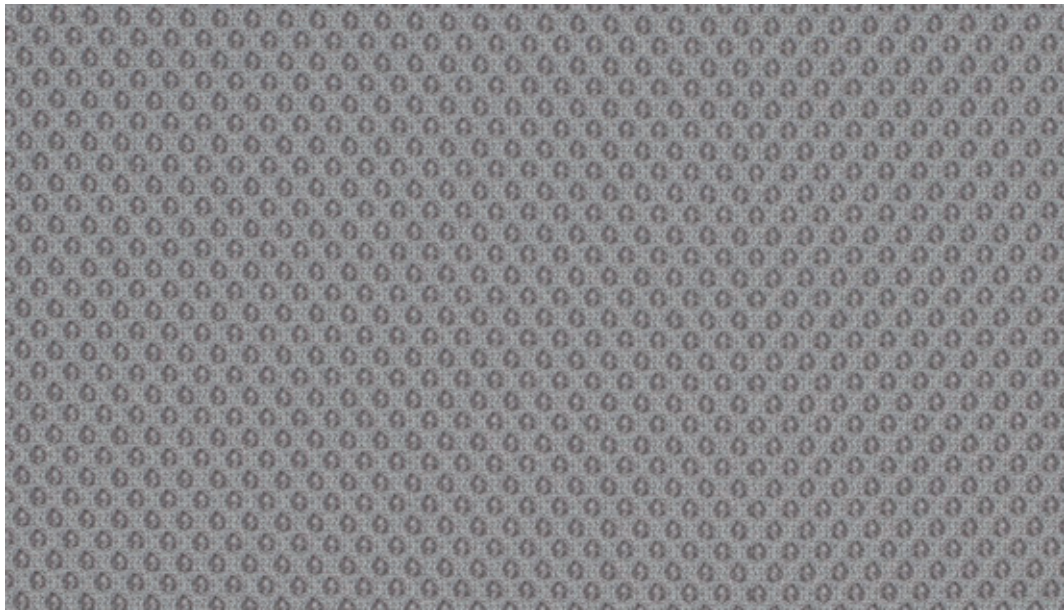

60165



60061



61128



60165




61110




63034




60011




62064



64119



60025



64089



60999



61129



61130

Please be aware that the PDF colour shades can appear different from the real fabric colours.



65078



66140



66123




66064



66063




66120



68137




68108



68056



68109



68110

RUNNER™

Design no.	8705	
Fields of application	contract	
Material	polyester	100%
Weight	510 g/lm · (16.45 oz/lin.yd.)	
Width	160 cm · (63")	
Abrasion resistance	rubs · BS EN 14465 · BS EN ISO 12947-2 (Martindale)	70,000
Pilling	scale 1-5, max. 5 · EN ISO 12945-2	5
Colour fastness to light	scale 1-8, max. 8 · EN ISO 105 - B02	5-7
Colour fastness to rubbing	scale 1-5, max. 5 · EN ISO 105x12 (wet/dry)	4-5
Cleaning	dry cleaning	P(W)
	Shrinkage: max. 5%	
Flammability	EN 1021 1&2 · CAL 117-E class 1 · UNI 9175 Class 1 Emme · CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	
US ACT	<ul style="list-style-type: none"> ☀ AATCC 16 Light fastness 🍷 AATCC 8 or 116 wet/dry crocking 🔥 California Bulletin CAL 117-E Class 1 🔥 CA TB 117-2013 ⚠ ASTM D4157-02 Wyz Abrasion (Heavy Duty Upholstery) ★ ASTM D3511 Pilling 	<ul style="list-style-type: none"> pass pass pass pass pass pass
Design/Colours	Inger Mosholt Nielsen/Cenk Kivrikoglu	
Subject to changes and colour differences		

