



OBIKA LEATHER+™


by Gabriel

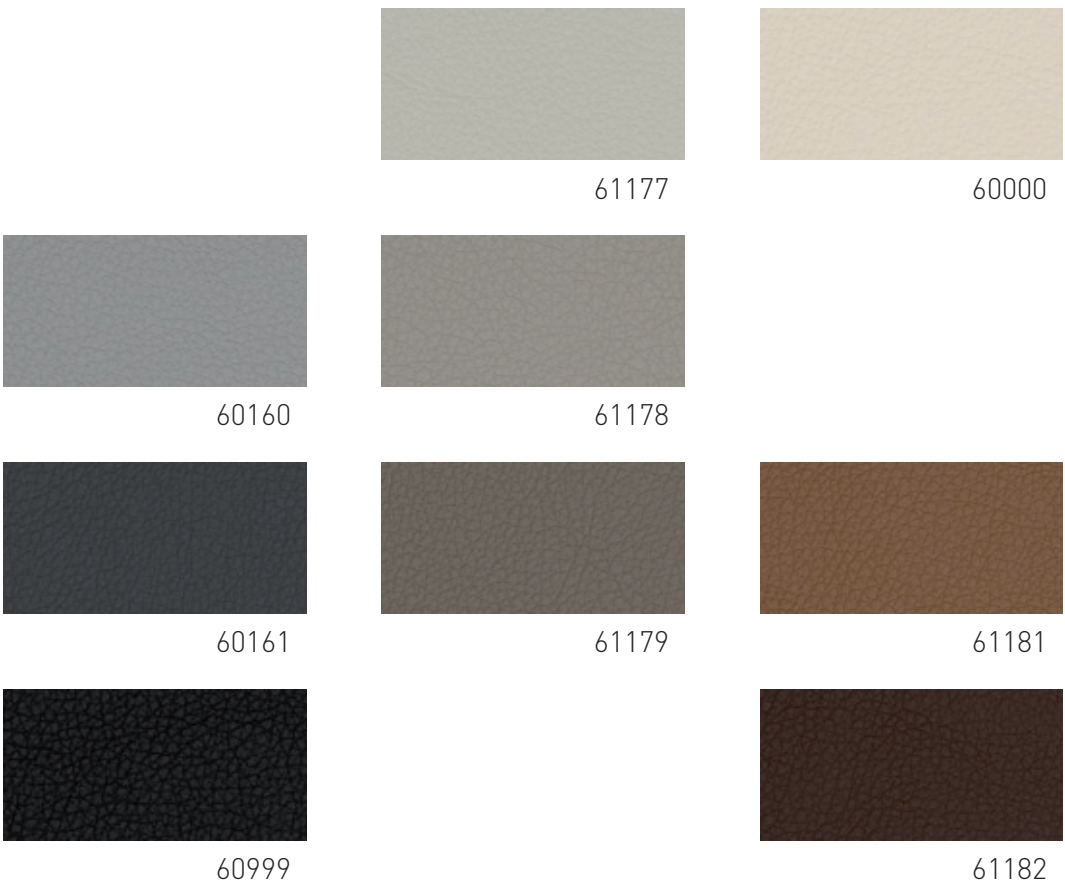

Please be aware that the PDF colour shades can appear different from the real fabric colours.




65079




63061



63059




64121



63060



64122




65080


Please be aware that the PDF colour shades can appear different from the real fabric colours.




61177




66139



66136




67049



66137



67050



68105



66138



67051

OBIKA LEATHER+™

Design no.		9411
Fields of application		contract
Material fabric	polyurethane · polyester · cotton	66% · 24% · 10%
Weight		1000 g/lm · (32.25 oz/lin.yd.)
Width		140 cm · (55")
Abrasion resistance	rubs · BS EN 14465 · EN ISO 12947-2 (Martindale)	250,000
Colour fastness to light	scale 1-8, max. 8 · EN ISO 105 - B02	5-7
Colour fastness to rubbing	scale 1-5, max. 5 · EN ISO 105x12 (wet/dry)	4-5
Coating adhesion	N/50 mm · ISO 2411 · as received (warp/weft)	91,8/89,2
	N/50 mm · ISO 2411 · after 5 weeks ageing at 70°C and 95% rh(warp/weft)	94,3/92,1
Flexing	ISO 7854 Method B · no cracking at 700,000 flexes as received ISO 7854 Method B · no cracking at 300,000 flexes after 5 weeks ageing at 70°C and 95% rh	
Maintenance	dry cleaning can be wiped with Virkon S, Achtichlor Plus, Prime Source Ren-93, Ethanol (70%) - as long as you follow the manufacturers instructions for the product solution and wipe the fabric with a cloth dampened in clean water afterwards.	P(W)
Flammability	EN 1021 1&2 · BS 5852 0&1 · BS 5852 Crib 5 · CA TB 117-2013. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	
US ACT	<ul style="list-style-type: none"> ☀ AATCC 16 Light fastness ☪ AATCC 8 or 116 wet/dry crocking 🔥 California Bulletin CAL 117-2013 section 1 ⚠ ASTM D4157 Wyz Abrasion (Heavy Duty Upholstery) ★ ASTM D3511 Pilling 	<ul style="list-style-type: none"> pass pass pass pass pass
Design/Colours	Inger Mosholt Nielsen / Helene Jensen	

Subject to changes and colour differences

